

# THE PUP<sup>®</sup>

Specialty-Use Side Loader



*"The Pup is perfect for parks and trails."*

## Perfect for collecting refuse or recyclables in restricted public areas.

The PUP is ideal for parks and recs, beaches and resorts, campuses, zoos and mobile home courts — wherever larger refuse trucks can't go or are not practical. Choice of truck-mounted or trailer-mounted models with barrel and cart loading options.


### Standard Features:

- packs a ton — fits on one-ton trucks
- loads from both sides
- totally enclosed hopper — keeps trash contained
- full-eject unloading, no body tipping
- truck-mounted or trailer-mounted models



PUP trailer with gas or diesel engine

**WAYNE<sup>®</sup>**  
ENGINEERED FOR PERFORMANCE  
[www.WayneUSA.com](http://www.WayneUSA.com)

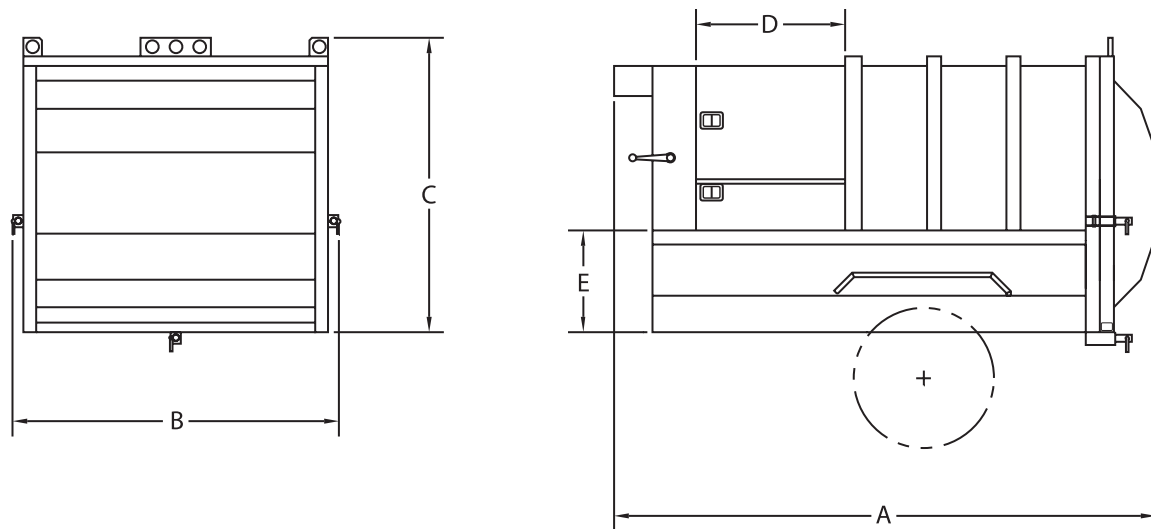

### BODY SPECIFICATIONS

|   | chassis-mounted | trailer-mounted |
|---|-----------------|-----------------|
| A: Total length                           | 116"            | 180"            |
| B: Total width                            | 70"             | 70"             |
| C: Total height above frame, body height  | 63"             | 63"             |
| D: Loading area (sill) width              | 31"             | 31"             |
| E: Loading area (sill) height above frame | 25"             | 22"             |
| Empty body weight                         | 2,300 lbs.      | 3,500 lbs.      |

### Body

- Body size — 6 cu. yd.
- Fillable body capacity — 4 cu. yd.
- Practical fillable loading area — 2 cu. yd.
- Manual rear door(s), standard
- Horizontal push load ejection
- Standard body can be loaded from both sides
- 11 gauge standard body and hopper thickness
- Meets all ANSI Z245.1 safety standards

### Hydraulic Specifications

- System working pressure — 1,500 PSI max
- Standard oil flow — 12 GPM, chassis-mounted; 8 GPM, trailer-mounted
- Standard operating pump RPM — 1000, chassis-mounted
- Reservoir capacity — 12 gal.
- Standard loading area cycle time:
  - 15 seconds, chassis-mounted;
  - 18 seconds, trailer mounted
- Two 2½" packing/ejection cylinders
- Return filter — 10 micron return

### Chassis Requirements

- 60" minimum useable cab-to-axle length
- 10,000 lbs. GVWR minimum, for estimated average payload

### Optional Equipment

- Barrel dumper — right or left side
- Cart tipper — right or left side
- European cart tipper — right or left side
- Strobe light or rotating beacon
- Work light — right or left side
- Hydraulic tailgate with auto lock

**WAYNE<sup>®</sup>**  
ENGINEERED FOR PERFORMANCE

701 Performance Drive, Cedar Falls, IA 50613  
Phone: (319) 266-1721 • Fax: (319) 266-8207

Tollfree: 888-66WAYNE  
[www.WayneUSA.com](http://www.WayneUSA.com)